



PANEL HANDLING


VERTICAL

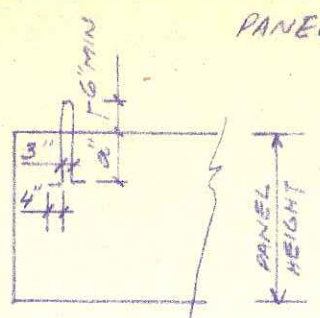

BEARING PANEL (TYP. BUTT JOINT).

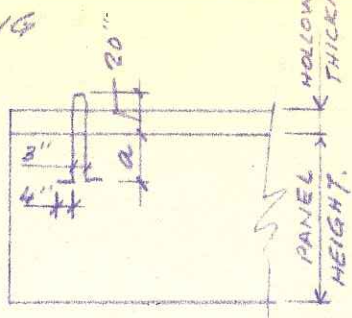


PANEL WITH LEDGE (EXTERIOR JOINT).

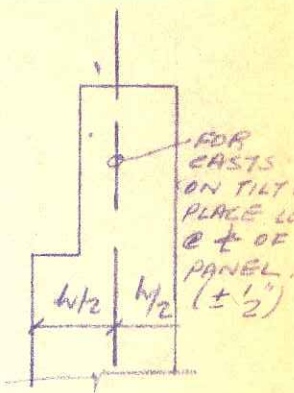


STRAND DIA	LIFTING CAPACITY	a
5/16" - 250K	5.8K	13"
7/16" - 250K	10.0K	18"
1/2" - 270K	15.0K	20"


HORIZONTAL

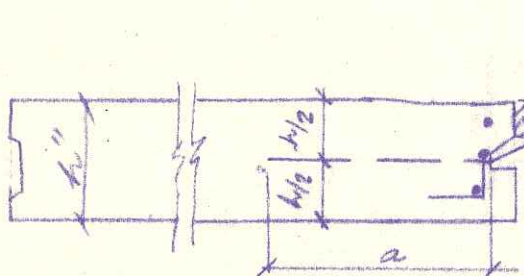

PANEL WITHOUT LEDGE

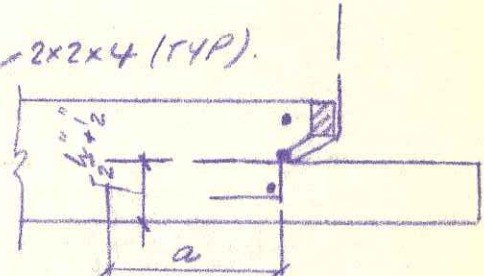

PANEL WITH LEDGE.

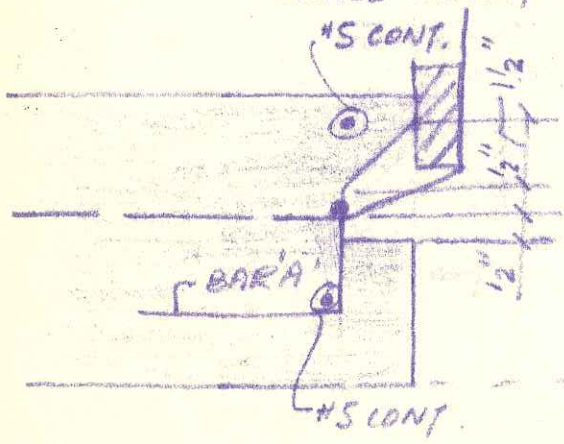


SECTION





PLAN

PANELS WITH LEDGE

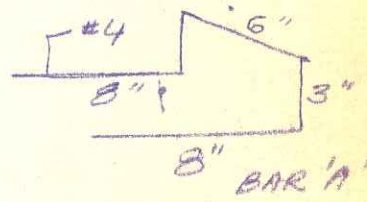


8" BAR 'A'

**SLAB HANDLING**

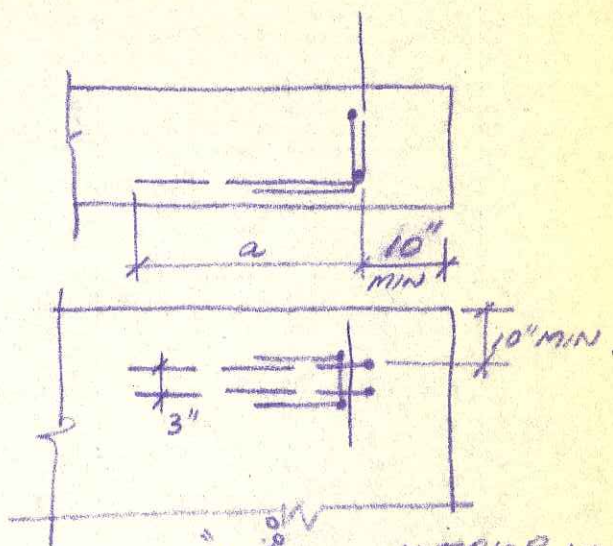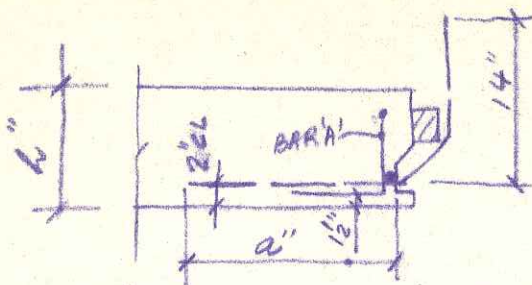


EXTERIOR LOOPS

INTERIOR LOOPS.

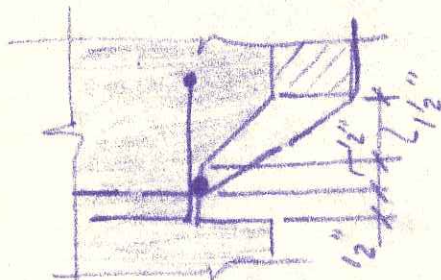

Details of Recess

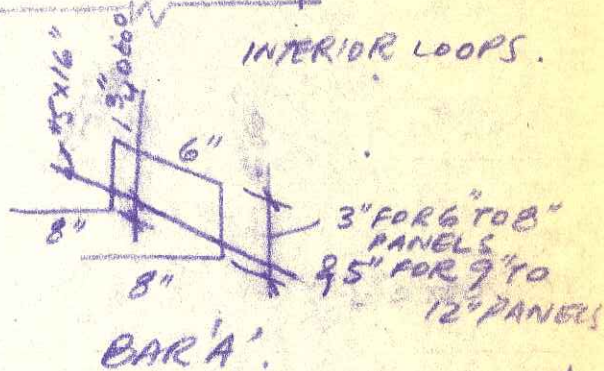

h"	EXTERIOR LOOP CAPACITY	INTERIOR LOOP CAPACITY	MIN STRAND DIA	a
5"	2.4K	3.6K	5/16"	18"
6"	4.7K	7.1K	7/16"	18"
7"	6.5K	9.8K	7/16"	18"
8"	9.5K	14.3K	1/2"	20"
9"	12.2K	15.0K*	1/2"	20"
10"	15.0K*	15.0K*	1/2"	20"

\* CONTROLLED BY STEEL CAPACITY.